



PRODUCT DATA SHEET

Connecting profile for dry lining
9,5 mm PB
Item no. 3784

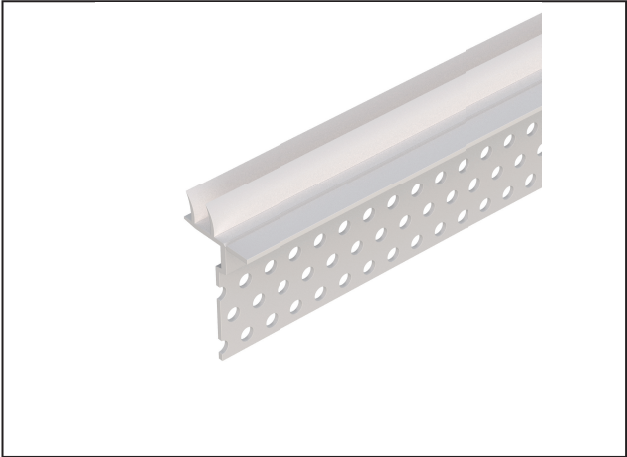

Status: 27.09.2024 | 01:09

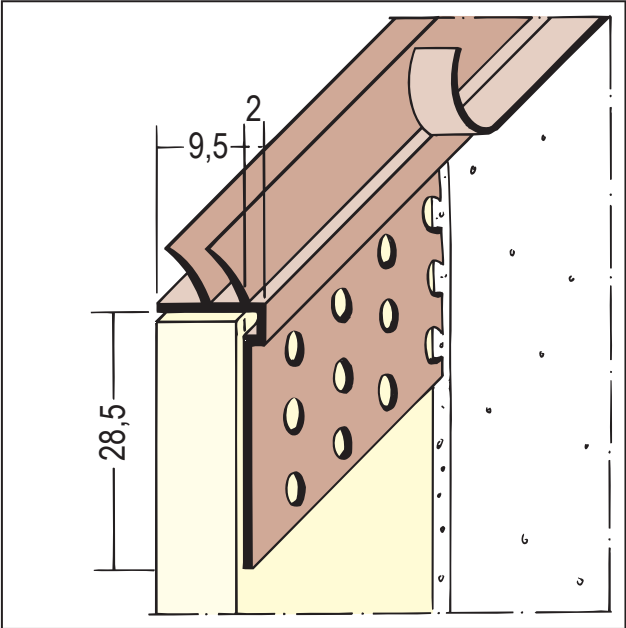

Designation	Connecting profile for dry lining 9,5 mm PB
Description	Plaster PVC stop profile for plasterboard panels of 9.5 mm and thicker, with “sealing lips” made of flexible PVC, for creating elastic connections to adjacent building elements, such as for the area of sliding ceilings and wall connections. Detachable protective strip protects adjacent building elements, such as doors, against dirt. The profiles must also be fastened with clips.
Product area	Internal construction
Product category	Design profiles
Plaster thickness	1 mm
Material	Hard PVC
GK/Plate	ab 9,5 mm
Product length	300 cm
Productcolor	10, white
Treatment	All profiles must also be fastened with clips.
Packaging Unit	30 PCS / 63 BOX
Shadow gap	6,5 - 3,5 mm

This product data sheet corresponds to the current state of development of our products and loses its validity upon publication of a new edition. Make sure you are using the latest edition of this information. Warranty and liability are based on delivery according to our general Terms and conditions. Please observe the application assembly and storage guidelines.

All statements without guarantee. Reserve technical changes. Product illustrations may differ from the delivery product. Tender specifications, installation instructions and performance declarations (if required by law) can be found on our homepage. Please respect the environment for a proper disposal!